


Kinematics of Machines
Prof. A. K. Mallik
Department of Civil Engineering
Indian Institute of Technology, Kanpur

Module - 3 Lecture -2

As told at the end of the last lecture, we shall continue our discussion on displacement analysis of planar mechanisms using graphical method. Last time we had seen examples in which all were six link mechanisms with single degree of freedom. Today, we shall discuss or take up a little more involved mechanism with more number of links and may be with more number of degrees of freedom and so how the graphical method can be used for displacement analysis. As the first example today, that is the fourth example in the overall displacement analysis, we consider a nine link front end loader.

(Refer Slide Time: 01:03)

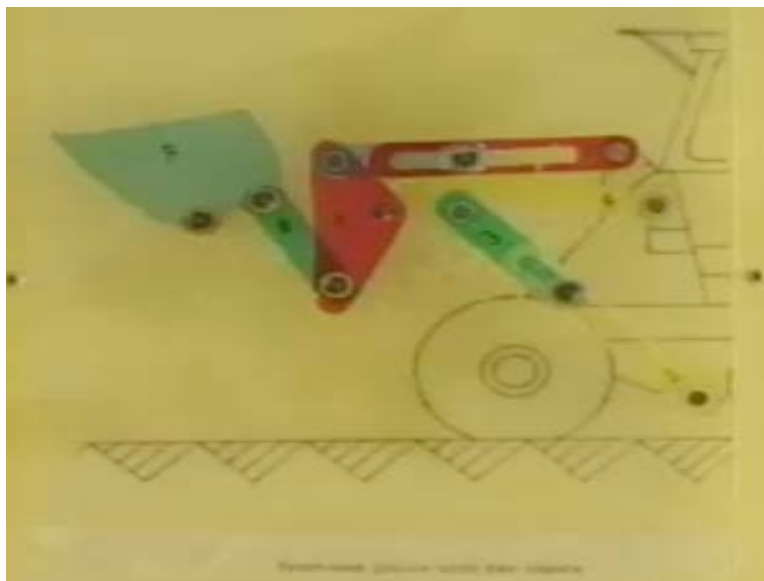


First, let us have a look at the model of this loader. To start with, let us first discuss the model of this mechanism which is used for a front end loader. As we see there are two hydraulic actuators between link number 2 and link number 3 and there is another hydraulic actuator between this red link and this link, that is link 6 and link 7. By moving these two hydraulic actuators, we can move the front end of this loader, that is this bin

which is link number 9. We will first show, that this particular mechanism has 2 degrees of freedom and with two inputs here and there, so these two hydraulic actuators. Consequently, this output link cannot go anywhere with any arbitrary orientation. It will have only two independent co-ordinates, which we can specify either the xy co-ordinates of the point only or the orientation will be automatically fixed up or only the x co-ordinate and the orientation of this bin and the y co-ordinate will be automatically decided.

Let us determine the displacement analysis of such a mechanism by graphical method, that will be our next example. Let us now discuss the problem of displacement analysis with reference to this front end loader, the model of which we have just now seen. As we see there are two hydraulic actuators, one named Z_1 and the other named Z_2 .

(Refer Slide Time 02:57)

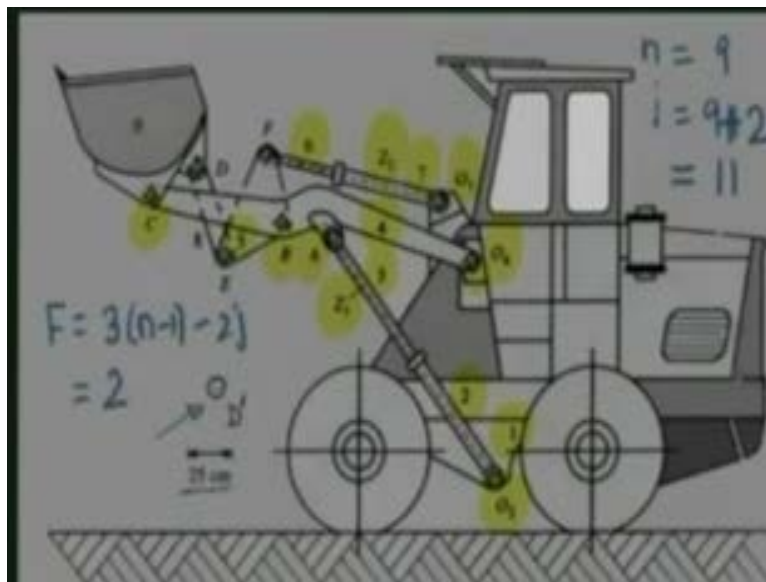

Link number 1 is the body of the truck and this hydraulic piston cylinder constitutes link 2 and link 3. There is obviously a prismatic pair between link 2 and 3, which is the piston and the cylinder. Similarly, there is a prismatic pair between link 6 and link 7 where there is a hydraulic actuator, again between the piston and cylinder of this hydraulic actuator. Link 7 one end is connected to this body of the truck, at the revolute pair at O_7 , Link 4


one end is connected to a revolute pair to the body of the truck O_4 and link 2 one end is connected to the body of the truck by a revolute pair at O_2 .

Let us see this mechanism does not have all binary links, as we have considered earlier. On the first example that we considered, they had either binary link or ternary link. If we consider link number 4, as we see this is connected to four different links, namely to link 1 at O_4 , link 3 at A, link 5 at B and link 9 at C. So, link 4 which has four revolute pairs becomes a quaternary link and link 5 is a ternary link connected to link 8, link 4 and link 6. Link 9 is the front end of the loader that is, the bin.

In this mechanism, because we have a quaternary link, that is a very higher order link, I will show how to conveniently use the tracing paper as an over lay as we discussed in the previous lecture. Let me state the problem, the problem is posed as follows: that if the point D of link number 9 comes to D prime. This is the scale of the drawing, 25 cm is represented by this distance. When the point D comes to D prime, can we locate all other revolute pairs? That means, where they move in this consideration, when point D of link 9 has moved to D prime.

Before that, let me show that this mechanism has 2 degrees of freedom. For that we count the number of links n , which as we have seen 1, 2, 3, 4, 5, 6, 7, 8, and 9, n is 9. Let me count the revolute pairs and prismatic pairs, that is j number of joints. What we see, we have 1, 2, 3, 4, 5, 6, 7, 8, and 9, 9 revolute pairs plus 2 prismatic pairs, that is at these two hydraulic actuators. So, total j is $9 + 2$ that is 11. If we remember our formula to calculate the degrees of freedom that is F is equal to 3 times n minus 1 minus $2j$, which we get, 3 into 9 minus 1 minus 2 into 11 , 22 that is F is equal to 2 . Thus, it is 2 degrees of freedom mechanism because we have two independent inputs at these two hydraulic actuators, it is a constant mechanism because it is 2 degrees of freedom, I can have 2 degrees of freedom for this output bin, that is the point D can go to D prime but at that location the orientation of bin will be automatically determined. I cannot take D to D prime and then again change the orientation. So, we solved this problem, when D goes to D prime, how do we determine the location of all other revolute pairs? That is the first part of the problem.

(Refer slide time 07:32)

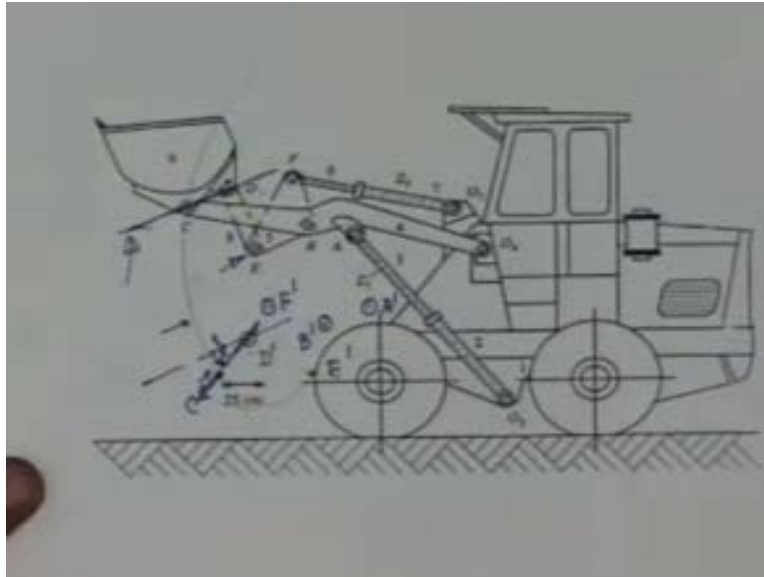

This is the figure of the same front end loader which we are discussing right now. As I said earlier, the point D has moved to this point, which I call D one and the objective is to find the location of all other movable revolute pairs that is at A B E F and C. We should note that O_4C being two revolute pairs on the same rigid link 4, the distance O_4C cannot change. So, C must move on a circular path with O_4 as centre and O_4C as radius. This is the circle on which C must move, also D and C being two points on the same rigid link, that is number 9, that is the bin, this distance also cannot change because I know the location of D prime, I put my centre of a circle with DC as radius with D one as the centre.


If I draw this circular arc, C must lie on this circle. Thus, we get that C should lie on this circle and also on this circle, that means the intersection of these two circles determine the location of C, when D moves to D one, C moves to C one. To locate the positions of the hinges, say A and B, which lie on link 4, as we noted earlier link 4 is a rigid link, but it is a quaternary link having 4 hinges, one at O_4 , other at A, other at B and one at C. When D comes to D_1 , C has moved to C one, O_4 does not move, so, O_4 remains there. To locate the positions of A and B, corresponding to the second position, what we do, we take a tracing paper and mark these points: O_4 , A, B and C. The relative positions of these O_4 , A, B, C can never change because they lie on the same rigid body.

What I do is I move this tracing paper now with O_4 at O_4 and C at C one. These two red dots, which are the positions of A and B is automatically determined, A and B moves to these new locations. If we can now pierce this tracing paper here and there, I immediately get the locations of A and B. This point will give me A one and this point will give me the location B one. Let me repeat it once more because O_4 , A, B, C are four points on the same rigid link, I use this tracing paper as an over lay, mark the relative locations of O_4 , A, B, and C because two points define the rigid body completely and in the second position I know the location of O_4 and the location of C one.

I take these two red dots corresponding to O_4 and C to this new location and where ever these two dots come, they are the positions of A and B corresponding to the second configuration. Once, we have obtained D one and B one, it is very easy to determine the new location of this revolute pair E, because the distance DE does not change. With D one as centre, I draw a circular arc with DE as the radius. So, E must lie on this circle and BE also does not change. So, if B one as centre, I draw another circular arc with BE as the radius, where ever these two circles intersect, that gives me the location of E, which I call E one. Similarly, to determine F, I know the locations B, E and F. These are the three points on the same rigid link 5 so, I can again use this tracing paper as an over lay and mark B, F and E, their relative positions do not change and now, I know where B and E has gone. So, I can replace this, coinciding this B with B one, this E with E one and where ever F goes, that becomes the location of F, which I call F one.

I have determined the location of all the moving hinges namely: A, B, F, E, D as A one, B one, E one, F one and D one of course is given, and C as C^1 . So we have solved this part of the problem that corresponding to the second position, when D has moved to D one, where all other moving hinges go. Not only that, I can also find what is the inclination of the bin from the first position, that is this line CD, that was this initial orientation has now become this. So, angle between these two lines CD and C one D one determines the change in orientation of the bin. If I draw a parallel line to D one, let us say, this is the line which is parallel to CD, then this amount of counter clock wise rotation of the bin has taken place, when D has moved to D one. The problem that we have just solved, let me now restate the problem for your benefit, this was our example 4.

(Refer Slide Time: 14:35)

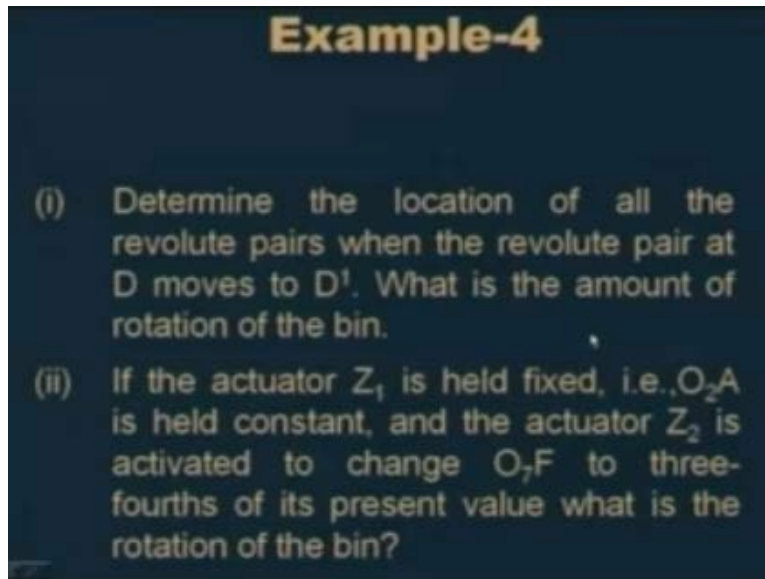


Example-4

- (i) Determine the location of all the revolute pairs when the revolute pair at D moves to D'. What is the amount of rotation of the bin.
- (ii) If the actuator Z_1 is held fixed, i.e., O_2A is held constant, and the actuator Z_2 is activated to change O_7F to three-fourths of its present value what is the rotation of the bin?

The first part of the problem that we have just solved is to determine the location of all the revolute pairs, when the pair at D moves to D one. We have also found out what is the amount of the rotation of the bin corresponding to this movement. I will leave an assignment for you to do from the same figure.


Assume the actuator Z_1 is held fixed, that is the distance O_2A is not changing and the actuator Z_2 is activated to change the distance O_7F in the figure to three fourths of its present value, then what will be the corresponding rotation of the bin. You can follow exactly the same logic and same technique of graphical analysis to solve the second part of the problem. Let me now go to another example, which is our example 5. I will show you a figure which will be simple 3R-1P mechanism to scale.

(Refer slide Time 15:40)

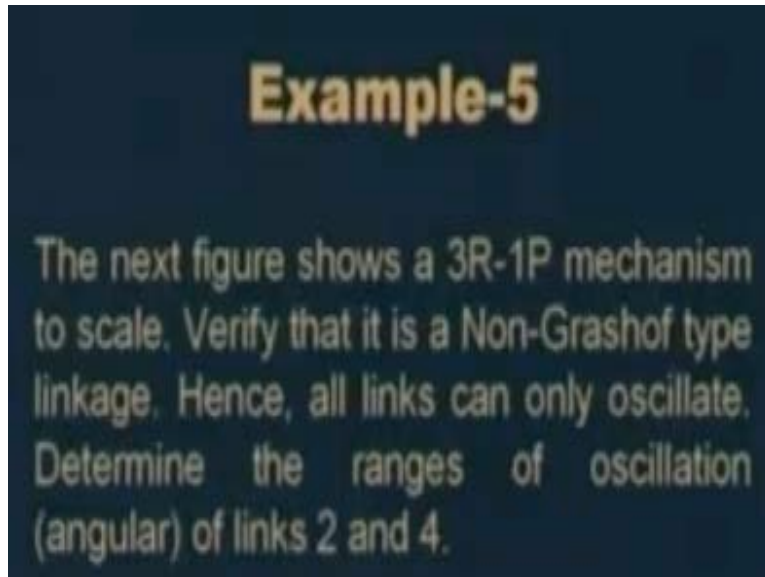

First we will verify that this is a Non-Grashof type linkage. That means, all the links can have only angular oscillation, no link can rotate completely. The problem will be to determine the ranges of oscillation of these links 2 and 4, in this particular Non-Grashof 3R-1P mechanism. Let me now show the figure of this problem and solve the problem for you.

(Refer Slide Time: 16:13)

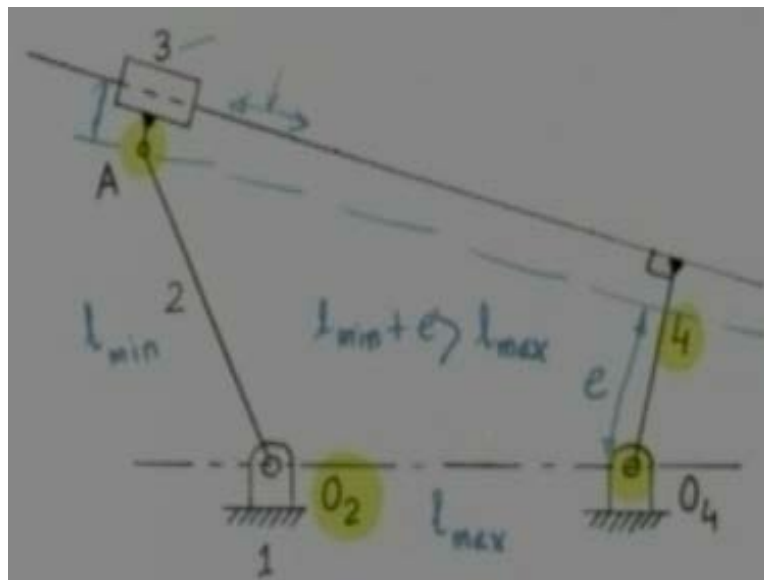


Let us now consider this 3R-1P mechanism, as we see the link number 2 has a revolute pair with link number 1 at O_2 and a revolute pair at A with link number 3 and link number 3 has a prismatic pair with link number 4 and link number 4 has a revolute pair at O_4 with link number 1. In this 3R-1P mechanism, there are three revolute pairs at O_2 , A, and O_4 , there is a prismatic pair between link 3 and link 4, in this direction. First of all let us identify, what are the kinematic dimensions of this 3R-1P mechanism.

O_2 , O_4 that is one link length, let me call l_{\max} and O_2A is another link length which is l_2 , let me call it l_{\min} . This 3R-1P mechanism has only one more kinematic dimension, that is the offset. One should not be confused by this dimension. This dimension has no kinematic significance because the location of this revolute pair A, I cannot change but the prismatic pair between 3 and 4, which is along this direction, I could have drawn it through A. This is the prismatic pair direction and this perpendicular distance from O_2 up to this direction of the prismatic pair, that is the other kinematic dimension E, which we call offset.

If we measure, this l_{\min} and e, we will find that, l_{\min} plus e is greater than l_{\max} . Consequently, this will be a Non-Grashof 3R-1P chain and no link will be able to rotate completely, all links will be oscillated. The question that is asked is, find the angle through which the link number 2 and link number 4 can oscillate. Let me repeat, it is this distance which is a red heading, which is there only to confuse you because it is the location of the revolute pair O_2 , O_4 and A, I cannot change and prismatic pair has no location, it is only a direction, that is marked by this line. So, I draw a line through A, parallel to this direction of prismatic pair and get the kinematic diagram for this particular linkage. Let me now solve this problem to determine the angle through which links 2 and 4 can oscillate.

(Refer Slide Time: 19:18)

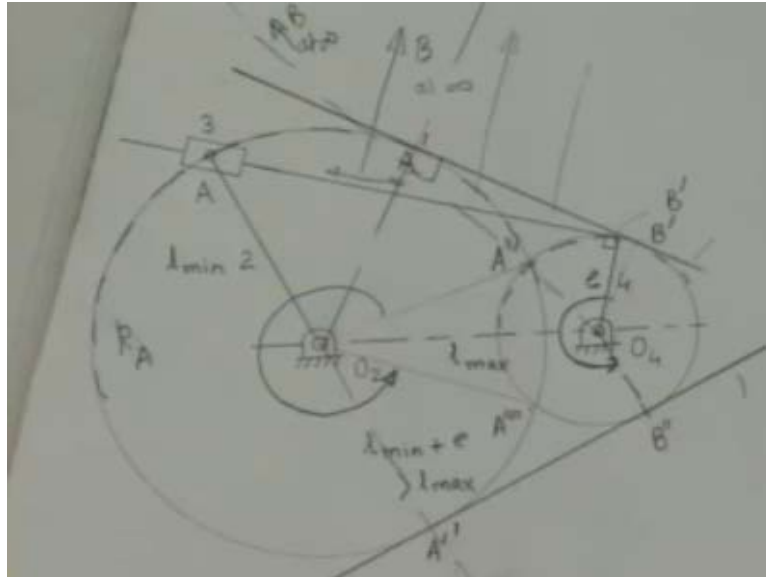

Let us consider the kinematic diagram of the 3R-1P mechanism we are discussing. This O_2O_4 , that is what we call l_{max} , O_2A , that is what we call l_{min} and perpendicular distance of O_4 from the direction of sliding passing through A , is what we call the offset e . By measurement, we can find that l_{min} plus e is more than l_{max} . So, it is a 3R-1P Non-Grashof chain and we have to find the angle through which the link O_2A and link 4 that is this line can oscillate. To solve this problem, let us imagine the equivalent 4R mechanism, that is the prismatic pair between link 3 and 4 in this direction. Let us replace it by a revolute pair at infinity in a direction perpendicular to this direction of slide, that is the hinge B of the $O_2 A B O_4$ which is the equivalent 4R linkage, B is on this line at infinity.

All parallel lines meet at infinity, so I can take any line perpendicular to the direction of sliding and claim that B is at infinity on any of these parallel lines because all these parallel lines meet at infinity. To find the extreme position of link 2 or link 4, what I know, the other two links, that is say for extreme position of link 4, link 2 and link 3, that is, O_2A and AB must be collinear. A must move on this circle which is centered at O_2 and radius O_2A . This is the path of A , we call it k_A and this offset e , this distance rotate with O_4 as centre and e as the radius, that is this corner moves on this circle.

Let me draw a common tangent to these two circles, one centered at O_2 and the other centered at O_4 . The common tangents between these two circles are these two lines. This is one circle centered at O_4 , this is other circle centered at O_2 with O_2 as radius (Refer Slide Time: 23:00). So, these two lines represent the common tangent to these two circles. Let me see what happens when A occupies rather this point, if I call it B prime, B is at infinity, I call this point B prime. When B prime comes here and if it oscillates in this direction up to this point of tangency, let me call it as B2 prime.

Let me find where is A. These are the extreme positions of link 4 because as we will see O_2A and AB has become collinear now because A is here which I call A prime and A is here which I call A double prime, so O_2A prime because it is tangent, if perpendicular to this direction of sliding and B is also at infinity to this direction of sliding. So, O_2A prime and B at infinity has become collinear, same is to for the other configuration, O_2A double prime and B which is perpendicular to this line direction of sliding has become collinear. Consequently, link 4 has taken its extreme position. This is the angle through which link 4 oscillates, where O_4B prime is common tangent I have drawn and this is the point of tangency, this is the common tangent to these two circles, this is the point of tangency. To find the extreme position of link 2, I have to say that O_4B prime and B prime B should become collinear.

These two circles intersect at say this I call A triple prime and this as A four prime. Now B is moving on this circle, so B prime is also here, this point has moved to here and O_4 if I join this, the B goes to infinity in this direction, because B will be always perpendicular to the direction of sliding at infinity. So what we see, that this link 4, O_4B prime and link 3 AB prime have become collinear and consequently, link 2 has taken its extreme position. Same will be true for this point of intersection and link 2 oscillates through this large angle between this extreme positions.


(Refer Slide Time: 26:33)



Just now we have seen very large angle of oscillations of the input and output links of a 3R-1P mechanism which is of Non-Grashof type. Here is a model, which is again a 3R-1P mechanism and this is the l_{\min} and this is the l_{\max} and e is such that l_{\min} plus e is more than l_{\max} . Consequently, this becomes a 3R-1P Non-Grashof type linkage. Let us now observe that angle of oscillations of this link and this link. This is that common tangent that I was trying to draw between those two circles, this line is parallel to that common tangent and consequently this has reached its extreme position, it cannot be further inclined. However, this link can still go and as we see from this extreme position, it is returning, that it is rotating counter clock wise. Though this link is still going clock wise. This is the extreme position of this link and now it cannot go any farther, it has to return.

Again, it has reached that extreme position and it cannot go any further, but this link can go and the red link starts rotating in the opposite direction. This is the extreme position of this link, whereas this is the extreme position of this link. From this, this has to rotate in the opposite direction it cannot go any further. For this 3R-1P Non-Grashof type linkage, as we see it is a very complicated movement with a very large angle of oscillation for both link number 2 and link number 4. As a last example of displacement analysis, let us now consider a really complicated problem as shown in this figure.

(Refer Slide Time: 29:48)

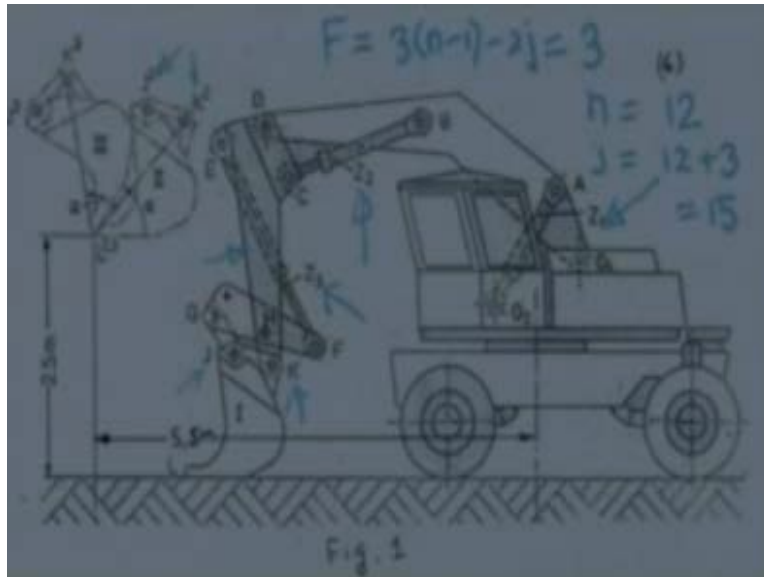


This is the figure of arc movement machinery, the model of which we have seen earlier. This particular machine has three hydraulic actuators one at Z_1 , other at Z_2 and the third one at Z_3 . This are three independent inputs, if we count the number of links in this mechanism, I will get $n = 12$. This will be clear when we draw the kinematic diagram of this particular machinery. If we count the number of pairs, we will see there are 12 revolute pairs and 3 prismatic pairs, so j is 15. Consequently, if we calculate the degrees of freedom of this mechanism: F is equal to 3 of time's n minus 1 of minus $2j$, we get 33 minus 30, that is 3.

So it is a 3 degrees of freedom mechanism with 3 independent inputs. Consequently, it is a constant mechanism and because of 3 degrees of freedom and with three inputs, this bin, that is the output link which is defined completely by these two hinges j and k can be taken anywhere with any orientation. That means, I can independently take j to say j_2 and k to another position k_2 , which will completely define the position and orientation of this output link which is the bin. Second thing to note is that, there is a very high order link, which is connecting at C, D, E, H and K . This particular link has 5 revolute pairs in it and it is a link of fifth order. So, we will show how we can use the tracing paper very conveniently to locate the revolute pairs in this kind of higher order link. Let me now solve this problem, that when j and k moves to j_2 and k_2 respectively, how can we locate

all other moving revolute pairs, that is at B, C, D, F, H and G and A. That is the problem that we will solve right now.

(Refer Slide Time: 32:23)

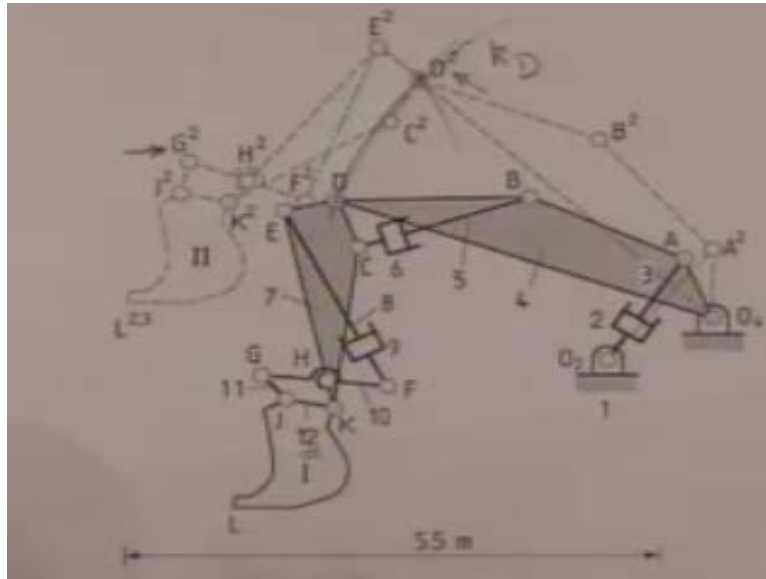

Let us consider the kinematic diagram of this arc moving machinery which we have just seen. As we have said, there are 12 links and this is the kinematic diagram, out of which link 3 as we see have 4 hinges on it, O_4 , A, B, D, so it is a quaternary link. Link 7 has 5 hinges on it - C, D, E, H and K, this is a link of fifth order. Then question is, when this J and k move to J two and K two, can we locate the corresponding positions of all other revolute pairs? To solve this problem first we note that the point D, because O_4D never changes and O_4 is a fixed point. This D point must move on this circle with O_4 as center and O_4D as radius, it must move on this circle. So, D two must lie on this line, let me call it k_D . Now k has gone to K two, the distance KD also does not change, I measure this KD and from K two, I draw a circular arc with k_D as radius. So, D must move on this circle and also the circle drawn earlier through D with O_4 as center. So, these two circles one point of intersection is here so I locate D two. Once I have located two points, that is O_4 and D two on this quaternary link number 3, A and B I can easily determine using the tracing paper. On a tracing paper, I mark O_4 , A, B and D. These four points, their relative positions do not change because they belong to the same rigid link 3.

Now O_4 does not move, so it stays here. When D goes to D two and O_4 stays at O_4 , where ever these two dots move, they define the location of A two and B two. We have also located the point K which has gone to K two and the point D which has gone to D two. Now link number 7 is a link of order 5 and it has 5 hinges namely: K, H, E, D and C. These five points do not change the relative position, but K has gone to K two and D has gone to D two. So, if I now take, this is K so K goes to K two and let me mark this point, so that will be easy to remember, this is K and this is D (Refer Slide Time: 35:58). K has gone to K two and D has gone to D two and these other mark points gives the location of C two, E two and H two.

There are five points K, H, E, D and C. I get K two, D two, C two, E two and H two. Once I have determined all these points, rest of the problem is trivial, because this distance is GJ and HG do not change. If I know J, which has gone to J two, H, I have located, so I can easily locate G two by JG and HG these two link lengths. Rest of the points, I leave for the students to complete. What we have demonstrated, is that the use of tracing paper is very convenient, when we have such higher order links and the displacement analysis can be completed if the problem is well posted. Let me now state the problem that we have just solved which was our example number 6.

(Refer Slide Time: 37:31)

Example-6

The next figure shows an earth-moving machinery consisting of 12 links and 3 inputs (hydraulic actuators).

(i) Determine the location of all the revolute pairs corresponding to configuration II when the hinges J and K occupy, respectively, the locations J^2 and K^2 .

In example 6, we had the figure which had the kinematic diagram of an arc moving machinery consisting of 12 links and 3 inputs, which had those three hydraulic actuators Z_1, Z_2, Z_3 . Statement of the problem was to determine the location of all the moving revolute pairs corresponding to configuration 2, when the hinges J and K occupy respectively the locations J two and K two. I can extend this problem for you to have some practice which are of little tougher.

(Refer Slide Time 38:02)

(ii) The range of movements of the actuators Z_1 and Z_2 are such that

$$(O_2A)_{\min} = 1100 \text{ mm} \quad , \quad (CB)_{\min} = 1500 \text{ mm}$$


$$(O_2A)_{\max} = 1800 \text{ mm} \quad , \quad (CB)_{\max} = 2400 \text{ mm}$$

Determine the zone in which the hinge K lies when the full ranges of movements of Z_1 and Z_2 are utilized.

Determine the maximum tilt angle α of the bin while keeping the lip L at the location L^2 .

The second part of the problem could be, the range of movements of the actuators Z_1 and Z_2 are such that the maximum distance between O_2 and A, that is $(O_2A)_{\max}$ is say 1800 millimetre to the scale and $(O_2A)_{\min}$ is 1100 millimetre. Similarly, the movement of the actuator Z_2 is such, that the maximum distance between C and B, $(CB)_{\max}$ is 2400 millimetre and $(CB)_{\min}$ is 1500 millimetre. The question is to determine the zone in which the hinge K lies when the full ranges of movements of Z_1 and Z_2 are utilized. The third part of the problem could be, determine the maximum tilt angle alpha of the bin while keeping the lip of the bin L at the location L_2 . As I said I will not solve this problem in detail just leave you with a little bit of hints.

(Refer Slide Time: 39:04)

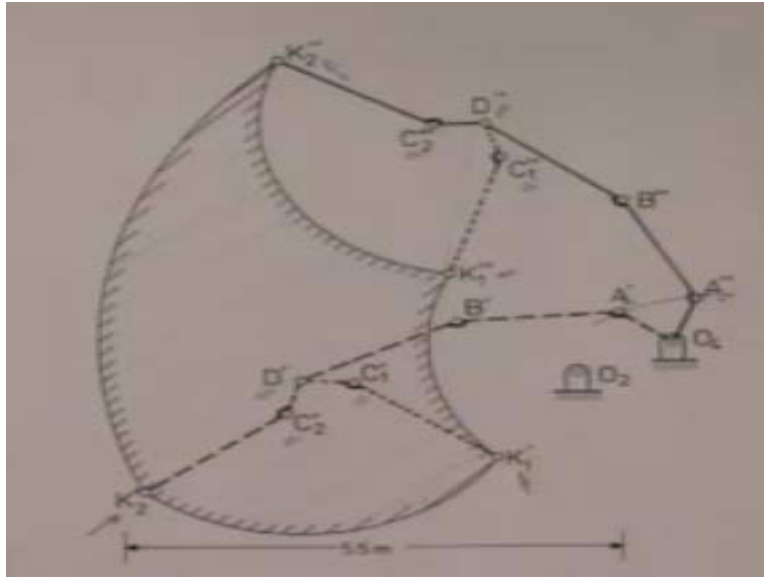


If we look carefully at the original diagram, what we can see, that this distance O_4A never changes because they belong to the same rigid body. Consequently A lies on a circle with O_4 as center and O_4A as its radius. The maximum distance between O_2 and A, which is given to us, locates this point. Minimum distance between O_2 and A, which is again specified in the problem locates this point.

I can locate position of A, for the extreme movements of this actuator Z_1 . O_4 , A, B and D, all four belong to the same rigid body, so using the tracing paper technique that we have just now seen, I can locate the corresponding position of D as D prime and D₂ prime. For the extreme positions, one can see that link 4 and link 7, get rigidly connected and that distance DC also does not change. Corresponding to the maximum position of DC and minimum position of DC, depending on the movement of the actuator Z_2 corresponding to D two prime, I get two locations for C. Same way corresponding to D prime, I get two locations of C, corresponding to the maximum and minimum distance of BC. Now D, C, K, they belong to the same rigid link, so corresponding to the D, C, I can locate corresponding positions of K here and here. Same way, corresponding to D prime, I get the extreme positions of K as this one and this one.

Now the question is, what is the range in which the hinge K lies when the maximum movements of these two actuators, between O_2 and A, and between B and C is utilized. This is the maximum distance BC, this is the minimum distance BC. One can easily see that when the two actuators have taken the extreme positions, the distance DK does not change. Consequently, this is a circular arc with D double prime as the center and this as the radius, same way this as the radius. So I get, these two circular arcs. Same way one can say, the distance from O_4 does not change again because if the actuators are at maximum locations, link number 4 and 7 get rigidly connected and K moves on a circle with O_4 as center.

This is another circular arc, joining K_1 double prime and K_1 prime with O_4 as center and another circular arc with O_4 as center and radius O_4K_2 prime. So these four circular arcs, determine the region in which the hinge K can lie when the maximum and minimum distance between O_2 and A, and B and C are utilized by the hydraulic actuators. In the full range of operation, the hinge K lies within this region. With this hinge we should be able to complete the problem.

(Refer Slide Time: 42:34)

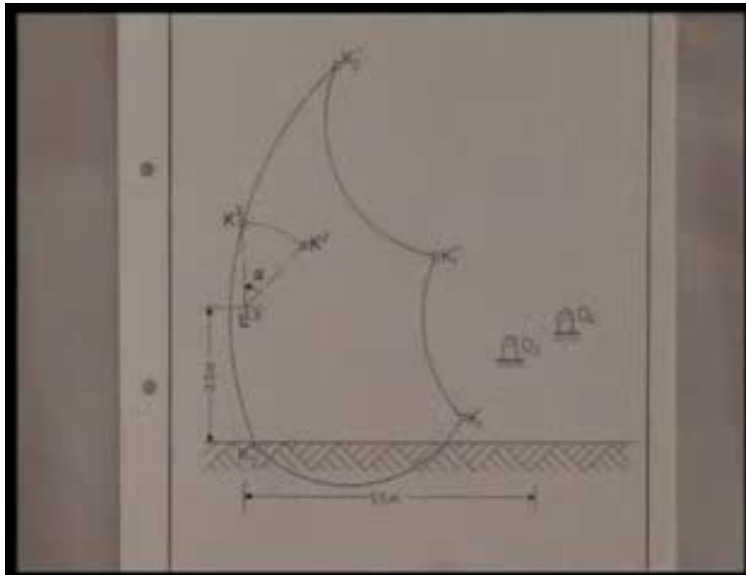

To answer the third part of the problem, that is the tilt angle of the bin when the lip is kept at this location L two, we solve it as follows: We have already determined that the

region in which the hinge K lies when the total range of movements actuators are used. The hinge K can never go outside these regions consisting of four circular arcs. But L and K are two points on the same rigid body, so their distance cannot change. If the lip is kept fixed at L then I rotate this line LK two to reach the boundary of this region, that is K three and this angle gives the angle of rotation that the bin undergoes keeping the lip at L. It cannot rotate any further because then K will go outside this range which is not possible for the range of movement of actuators which are given.

Let me now summarize what we have learned today. Today, we have solved three rather intricate or I would say more advance problems of displacement analysis of planar mechanism through examples having more than 1 degree of freedom, that is the front end loader and the arc moving machinery and the other is a 3R-1P Non-Grashof linkage. What we have seen, that this graphical method is very powerful and clever use of the tracing paper as an over lay can become very handy to solve even more complicated problems of displacement analysis. In our next lecture, we shall discuss the analytical method of displacement analysis.