

Metal Cutting and Machine Tools
Prof. Asimava Roy Choudhury
Department of Mechanical Engineering
Indian Institute of Technology, Kharagpur

Lecture – 17
Milling machine – indexing

Welcome viewers to the seventeenth lecture in the series; metal cutting and machine tools. So, in this particular lecture, we have discussions on you know the special machining features of milling machines which is indexing milling machines on the hole, they might be used for you know direct stock removal; that means, you have a slab of material.


You want to remove material from it to reach a smaller size or a desired size and shape you might be cutting special types of shapes on it by different types of cutters like you might be cutting a T slot, you might be cutting say different types of other shapes like say a bevel or say you might be doing some kind of spot facing apart from that the versatility of the milling machine is vastly increased, if some indexing facility is incorporated in indexing basically means here you know sort of dividing say circumference into some equal number of divisions.

If this is done there are many application engineering items which have vast application in which there are geometrical features distributed over their respective circumferences at regular intervals one very common example is the gear on the gear, we have similar successive features distributed on the surface on the circumference which are called gear teeth in a particular gear the teeth are of similar shape and size.

So, if the machining is successfully done for one such gear or 1 1 such tooth or rather a tooth space, if we find the method of rotating the gear at equal angular intervals, we can successively remove all those tooth spaces and ultimately realize the gear. So, we will be learning something about indexing simple indexing differential indexing etcetera, etcetera today.

So, let us move right away to our problem.

(Refer Slide Time: 03:02)

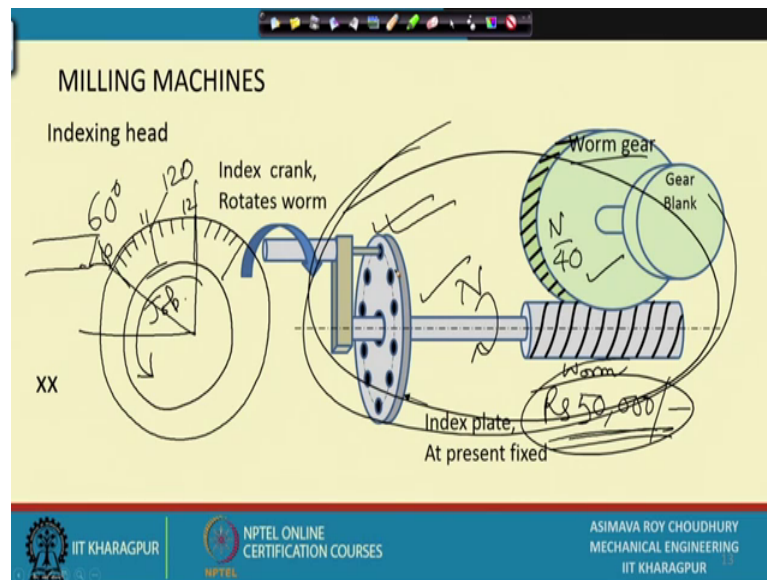

So, 17th lecture milling machines indexing; milling machines first of all the indexing head what is this indexing head that we are talking about first of all, let us see; what is our ultimate end use this is a gear blank, it might be something different it might be a cylinder on which we want to cut 4 sides at equal intervals, it might be say a hexagon to be produced from a cylinder or it might be as we have indicated a gear blank.

So, what we have already seen what a gear looks like and we have already studied what a worm and worm gear is. So, let me just add here this one is this one is a worm and this one is a worm gear and we have studied about worm and worm gear that is they can provide us with drastic reductions in rotation For example, if I am having say N rotations, here I might be able to get say N by 40 rotations that is no problem at all, I can reduce the amount of rotation 40 times.

So, on the milling machine table we place a device which will be capable of you know a of providing us with equal successive rotations of on this gear blank or for that matter any such item of our interest, but first question is why are we doing this we are doing it for getting equal angular rotations of a body, but is not there some simpler way of doing it what simpler way because this seems to be quite complex.

I do not know what it is supposed to serve what purpose, it is supposed to serve, but it is definitely going to be very costly this is our indexing head and its going to cost you to the tune of say several tens of thousands of rupees because you know I already I can


identify it has worm and worm gear that is going to be quite costly because the worm gear material and the manufacturing costs are going to be high there is going to be a shaft connecting it to this did this one which looks like you know some perforations at equal intervals on its circumference that is also not going to be very you know easy to manufacture and that will be costly and there is a crank handle sort of a thing probably with the with this handle you can go round and round here

So, that is also going to cost you quite a bit of money. So, I will place a say guess figure maybe you will be down by 50000 rupees and that is you know that is indeed quite a huge amount of money. So, spending 50,000 rupees just for rotating this at equal intervals I can do it with you know I can buy a watch dial how much would have watch dial cost nowadays watches are quite I mean clocks wall clocks are quite inexpensive and you can have this one for say hundred rupees just imagine 50,000 rupees and 100 rupees I stick it to this to do this job of mine.

So, my job is having this watch dial connected to it and I put a pointer here you know steady pointer does which does not shift from its position and someone says can you rotate the job by 60 degrees, I say this is no problem at all if there are 360 divisions or whatever number of divisions is there it must be an lcm of this particular 60 that you are talking about same maybe 120 divisions are here see we assume that say 120 such divisions are here. So, I go halfway and that way I can get 60 divisions just a moment I made a mistake degrees suppose someone wants 60 degrees ok.

So, in that case, this is 90 degrees and if you take 2 hours. So, 12 'o' clock 11 'o' clock 10 'o' clock this will be 60 degrees. So, I simply move from 10 to 12, I am able to rotate it by 60 degrees. So, why should I go for this has two distinct advantage actually because of which we do it what are these, these are first of all if you want fractions of rotation this will allow it to you to do that and next is that generally what happens is if there are very small amounts of rotation or the fractions are the whole number apart from the I mean apart from the whole number the fractional part is very small. So, for small rotations what happens is you will incur a lot of errors in order to do away with these errors we blow up the rotation which is required it is something like suppose you have to measure.


(Refer Slide Time: 08:05)

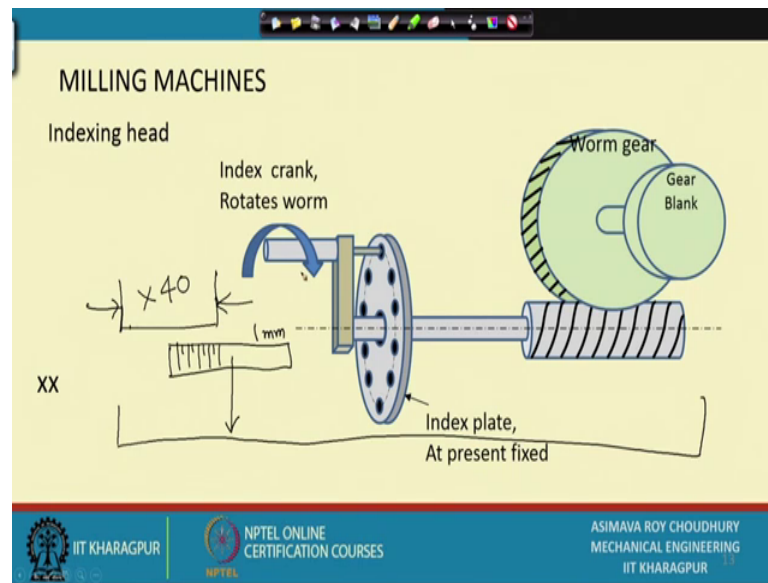

This distance I give you a scale for that whose least count is quite high say one millimeter therefore, you can make a maximum error of two millimeters for measuring this distance sorry, this distance has to be measured I mean you can make a quite a bit of error because these are comparable.

So, instead of directly measuring it suppose I multiplied by 40 by some mechanism I accurately increase this distance to this much and then I use the same scale for measuring it your percentage error will come down because your least count is still remaining same, but you are measuring a larger distance. So, the percentage error that you incur that is going to come down, so that is why whatever we want to measure this angle through which I have to rotate I make it much larger here in what way I choose a worm with say k equal to one number of starts equal to 1 and this one with number of teeth equal to 40.

(Refer Slide Time: 09:11)

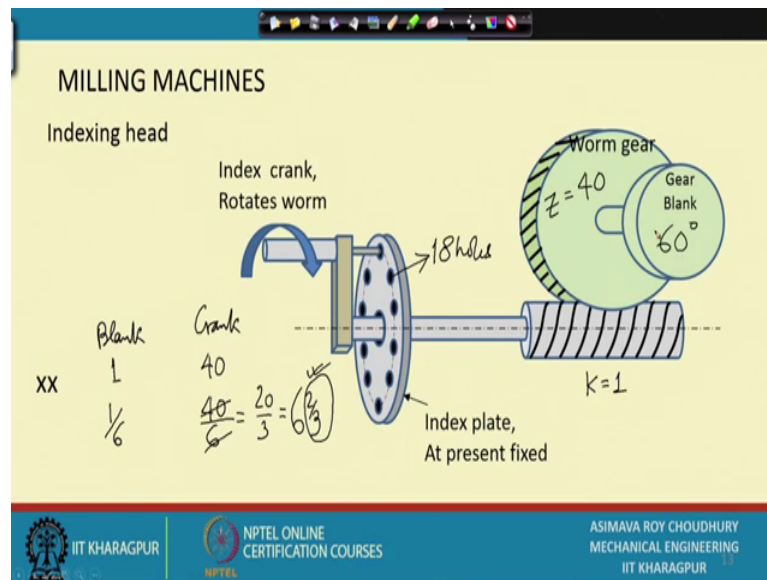


Therefore, if the blank rotates, once I sorry yeah once this crank has to rotate 40 times in order to implement it I rotate here 40 times the worm rotates 40 times this will only rotate once. So, I magnified the amount of rotation which is there on the blank; blank 1, crank 40 times. So, in that case if I want to you know rotate it by 60 degrees; that means, I have to rotate it by one sixth of a rotation which means that the crank will rotate 40 by sixth of a rotation which is equal to you know this will cancel 20 divided by 3 equal to 6 and two thirds of a rotation.

So, if I rotate these 1 by two-thirds; 6 and two thirds of a rotation, I will get exactly 60 degrees of rotation here. So, how do I do it well I can rotate 6 times very accurately because I come back to the same position, but how do I rotate this two thirds for that something very clever has been done here I make here a number of holes very accurately made an equi-spaced which is a multiple of 3 say, let us take 18, say 18 holes are there, if 18 holes are there, if I move, if I start from this point and count twelve holes I will have covered exactly to two thirds of a rotation. So, this way I make up that particular movement. So, if I am moving by 6 full rotations and two thirds of a rotation I will be exactly moving by 60 degrees here.

So, this is the basic idea of simple indexing. So, since time is short let us take a problem. So, I say I have to rotate by say how much we have done 6 degree oh we should take a trivial case also suppose I have to rotate 4 times.


(Refer Slide Time: 11:20)

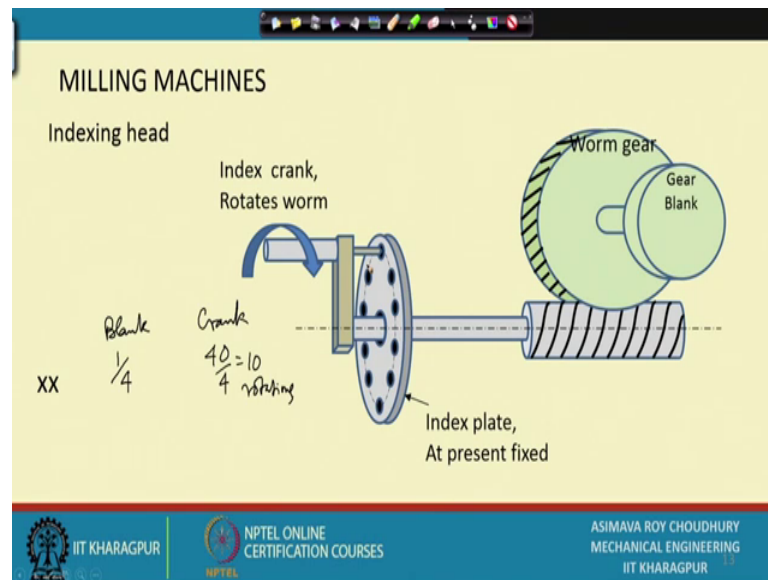

4 times, I want to you know rotate by ninety degrees. So, once again we say ninety degrees of movement; that means, how much, sorry, blank and crank. Crank means this handle which is moving round and round here. So, if I have to move by one fourth of a rotation I must be moving 40 by fourth of a rotation remember 1 rotation 40 rotations one fourth rotation 40 by 4 rotations unitary method. So, 10 rotations this is the simplest one ok.

So, 10 rotations will give me ninety degrees 60 degrees will be obtained by 6 and two thirds of a rotation. So, it seems everything is solved no. So, while I am skipping some of the you know some of the discussions on simple indexing I mean indexing this one is important suppose I do not have the number which is required what is that. So, let us take the case of a gear you know in gears this is quite possible I take up the problem of machining a gear in which there are.

(Refer Slide Time: 12:52).

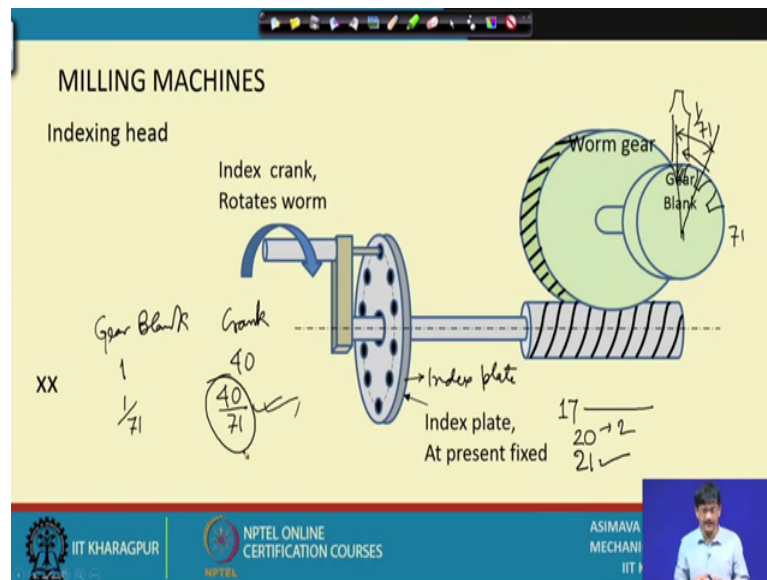

So, let me write gear blank one rotation 40 rotations on the crank.

So, previously I think you have already noticed if this goes round this shaft goes round and the worm goes round and the job rotates one 40. So, suppose I have 71 teeth on the gear. So, it has to rotate 1 by 70 first of a rotation between machining the basic idea is this I will machine out this part then I will machine out this part then I will machine out this part. So, I will cut this out with a cutter which looks like this and then I will bring this one here which has not been cut up till now and then I will cut it then I will bring this one here cut it like that. So, 1 by 70 first of a rotation has to be realized if there are 71 teeth this particular rotation is 1 by 71 this rotation is 1 by 71 this will be obtained by 40 by 71.

Now, how do I get 40 by 71 its easy on a 71 holes circle you move by 40 holes and that will exactly give you that fractional movement, but as you would have it 71 is not here. So, you will say why 71 has not been included that is because you know you might be having the requirement of having holes I mean numbers of holes varying from one to one is of course, hypothetical.

So, varying from maybe say seventeen or 15 right up to say infinity, how do you for the you know initial prime numbers you can have them covered by if you are taking say for example, twenty this covers two if you are twenty hole circle this takes care of two this takes care of five like that. So, if you if you are taking twenty one holes that takes care of

3 that takes care of 7, but 71 has not been included because its not possible to include all the prime numbers they are unending. So, this is left out


So, in that case what do we do in that case what we actually do is that we obtain differential motion up till now this body which is called the index plate index plate is not moving up till now, but now we have to make it move in order to obtain these fractions which are not there. So, let us quickly have a look what we are talking about next we will come to this one I would like to show you something first.

(Refer Slide Time: 15:51)




Yeah how does a gear cutter cut out those pieces? So, this is the cutter and this one is the you know gear blank where the cuts will have to take place this way here what we intend to do is in the other view this, if you if you look at it this way, you will be seeing a smooth circle circular body and we have to cut the teeth this way and this is going to cut it right through and go back ok. So, let us see how it does it.

(Refer Slide Time: 16:29)

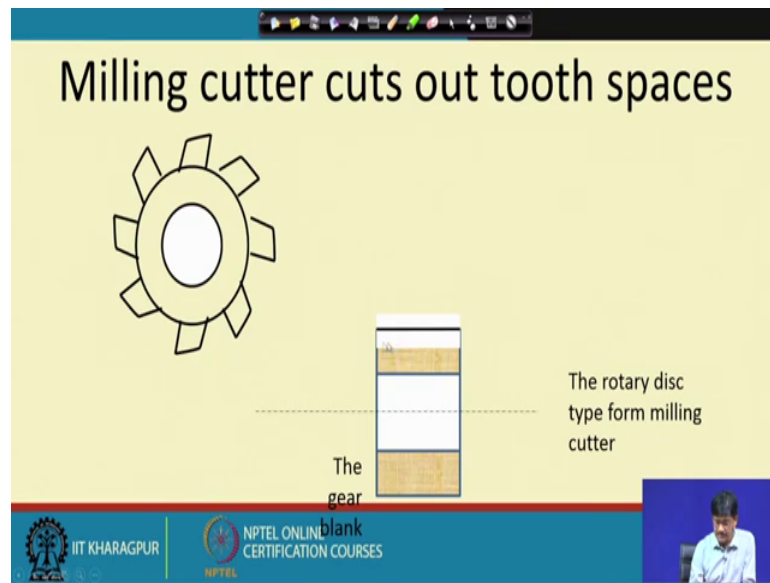


That is it; this white portion shows the material which is removed by this cutter which moves right through.

(Refer Slide Time: 16:37)

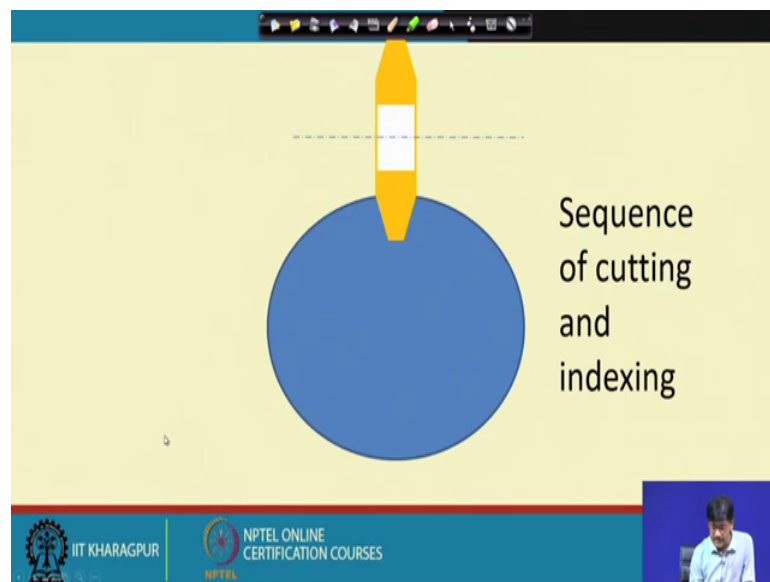

So, how this is done? Now let us see the other view this is the cutter.


(Refer Slide Time: 16:45)

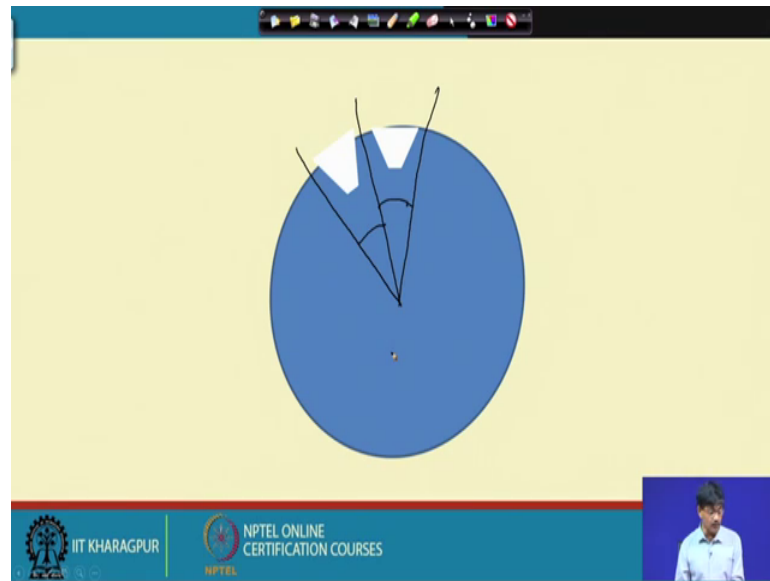

It cuts the material then this is what you do by indexing you shift it exactly by 1 by 70 first of rotation. So, that a potential portion has come the cutter, again appears and removes it please consider the drawing because it is not very accurate ok.


So, this is what we are doing. So, we have to make it possible to you know rotate by this amount every time every time I cut a tooth these are either assembly one teeth here 1 by 71; 1 by 71; this rotation has to be given successively 71 times ok. So, now, that we have understood what is to be done, let us see how it is done. So, we had started from here. So, let us move on forward once again this body has to rotate now in order to make up rotations which are 1 by 71. So, first of all what do we have we have this set up with us and do what are the number of holes that we have that might help us 71 is a prime number. So, it does not help that way also, but say I provide you with I have to provide you with something.

(Refer Slide Time: 18:13).

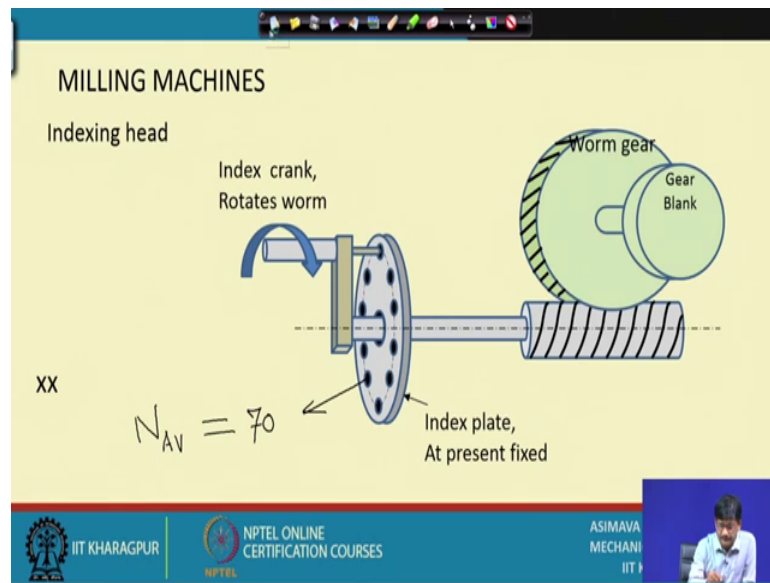

So, I say that the nearest number of holes which I sorry nearest number of holes which I provide you is 71 and I right here N_{AV} the available number of holes which are present here which is nearest its 70, but what do we do with that if we use that we are not going to get 71 teeth we again were going to get 70 teeth and that is that is going to mean that the gear bone we cut very accurately. So, let us you know see, what is the possible solution.


(Refer Slide Time: 18:49)

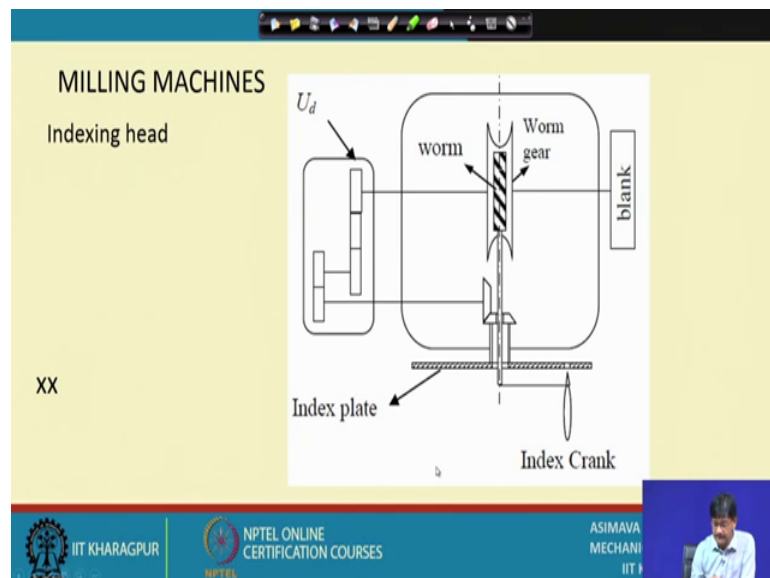

The possible solution is this first of all see what we are talking about this is the index crank this index crank was being rotated we are seen in a in a different perspective we are seeing it from the top this index crank rotates this rotates the worm this rotates the worm gear and this is your gear blank now what we do is we extend this shaft connecting the worm gear with the blank backwards and take a feedback we pass it through a gearbox remember gearboxes. So, gearboxes will be giving simply a change rotations per minute at the output irradiation with the input I get a changed value here and with the help of two bevel gears I rotate the index plate.

So, the index plate is not stationary now its rotating, but why are we doing it by the differential motion of the crank motion and the index plate motion we are going to get you know what is called the ratio of 1 by 71. Now what do we mean by this what we mean is we can see it here itself, if I am having say index crank this way let us pass on to the next figure I think we will get better chance of understanding this.

(Refer Slide Time: 20:26)

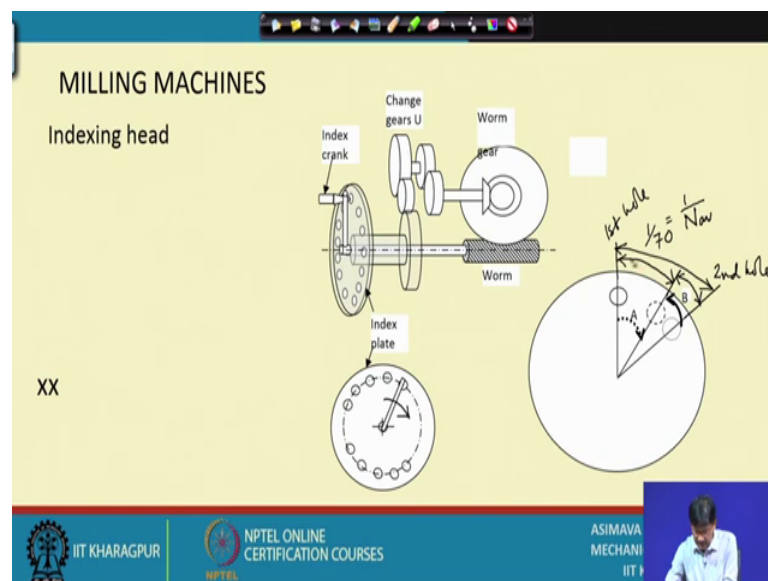


Yeah. So, if I am having this sort of I have drawn it in 2 to 2 dimensions in the sense that this is the index crank, this is the index plate, right goes the worm through and this worm is connected to the worm gear and here with the help of bevel gears I have turned the rotation and this is the change gears these are the change gears which allow me to rotate the index plate previously this index plate was stationary and the index crank was going all around this was the index crank going all around.

Now, the index crank will rotate and together with that this index plate will also rotate index crank will rotate and the index plate will rotate and they will rotate at different speeds they will rotate at different speeds if that be. So, in that case what is going to happen is suppose these holes are existing on the 71, 70 hole circle. So, this is the first hole. So, this is the second hole on the 70 whole circle second hole.

So, we can say this particular angle or rotation must be 1 by 70 equal to 1 by N available as we discussed previously what is this one then this one is equal to sorry this one then this one is the hypothetical it does not exist, but suppose I say that if N a 1, 71 hole circle had to be in existing this would have been the position of the second hole starting from this one this would have been the position of the second hole. So, let me draw it.

(Refer Slide Time: 22:31)

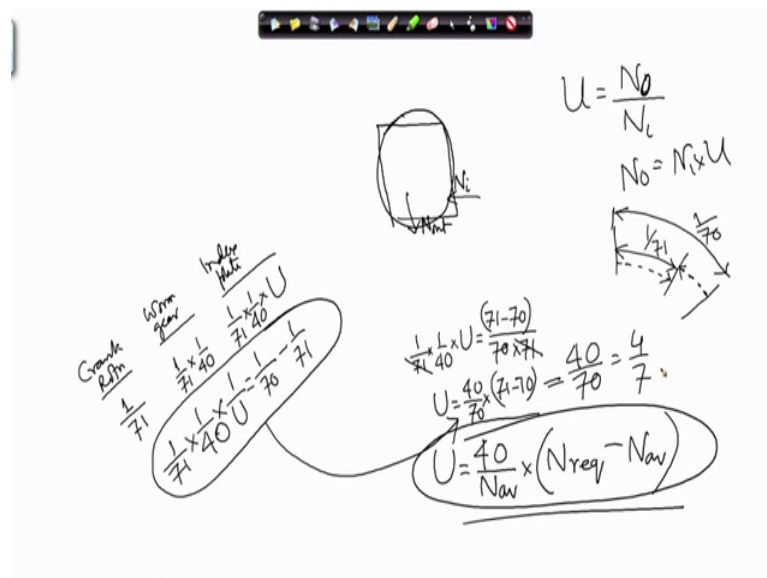

Then this one only this is the virtual hole it is not there, but this rotation would have been 1 by 71 this is what I want to achieve you know if the crank can be moved from here to here, my job is done if this rotation can be achieved by the crank my job is done, but what happens when the crank comes this way and it reaches this position it does not find a hole the hole is far off if; if it travels further down then it will be actually traveling 1 by 70 and our job is not fulfilled.

So, by the time the crank comes from here to reach this position why not make the plate move back exactly by this amount that is you pre plan the process. So, that when this crank reaches the virtual position of 1 by 71 second hole this index plate, sorry, I was

making mistakes in crank the index plate will rotate backwards and reach this position. So, that it will actually place a hole here for the crank to locate itself. So, I can achieve fractional movements of $1/71$ this way. So, let us do a quick calculation suppose I suppose I think that the problem is solved and therefore, crank rotation crank rotation is $1/71$; that means, I have achieved it see if I have achieved it how is it achieved by placing of these gearboxes this is the only external element here.

So, we can frame the problem this way what should be these change gears so, that this will happen. So, suppose I say that yes this is happening, I mean that case I am getting $1/71$ rotation because this is turning back and placing a hole here and therefore, I have achieved this rotation this rotation will be will be transferred unchanged to the worm, but on the worm gear it will be different.

So, I write on the worm gear the corresponding rotation will be $1/71$ into $1/40$ for shifting from the worm gear one is to one bevel gear and then the gearbox suppose the gearbox ratio is u remember gearbox ratios u is equal to input rpm for the gearbox sorry output rpm for the gearbox by input rpm what is the input rpm input rpm is this and what is the output rpm output rpm is here

So, this is the gearbox input coming here output going there. So, N_{out} by N therefore, out is equal to N I into u N , I is this one coming from the worm here therefore, we can say that this rotation which is given here it is transferred to the index plate. So, index plate directly we can write it is equal to $1/71$ into $1/40$ into u ; what is the value of u .

I do not know that we are going to solve only. So, index plate rotation I have found from this approach and from known values we know that it should be this much the index plate in this particular time should be rotating this much and what is this one this must be equal to since you know the larger rotation was $1/70$.


So, it should be equal to $1/70$ minus $1/71$. So, let us equate that $1/71$ into $1/40$ into sorry 40 into $1/u$ should be equal to $1/70$ minus, $1/71$ that said this is the basic equation that we follow and from here we get you know a lot of things will cancel out and we will get $1/71$ into $1/40$ into u is equal to 71 minus 70 ; 71 minus 70 which is 1 here, I am just keeping it for you know generalization divided by $72 \cdot 71$; 71 will cancel out and we will get u equal to 40 divided by 70 into 71 minus 70 , all right.

Now, there is scope for generalization we can write therefore, for any problem it is equal to $40 \text{ by } N \text{ available multiplied by } N \text{ required minus } N \text{ available}$ that is it ; that means, this is the relation $40 \text{ by } N \text{ available into } N \text{ required minus } N \text{ available}$ for certain cases this sign might change, but this is the general expression and how much is it coming to be , in this case our particular case of discussion $40 \text{ by } 70 \text{ into } 1$.

So, $40 \text{ by } 70$ equal to $4 \text{ by } 7$. So, if we implement a change gear ratio here of $4 \text{ by } 7$ this will make sure that the index plate will rotate back in such a way that fractional rotations of $1 \text{ by } 71$ will be possible and once that is possible a cutting a 71 teeth gear will not be a problem at all. So, what we learned from this exercise is that if we have to if we have a device by the help of which we can you know divide circumference into equal number of divisions in that case a number of machining applications become possible in case of milling and possibly the most the most variedly used application is the case of gear cutting and on the milling machine we saw a special type of tool which can be used which has the conjugate profile of the tooth space it can remove the tooth spaces $1 \text{ by } 1$ ok.

So, this method is quite versatile, but mind you for production of accurate gears this method is not applicable no this is generally used for maintenance this is generally used for one off production $1 \text{ or } 2$; that means, you know someone gives you an order you have a small shop and someone gives you an order I want five pieces of these gears then you make it for him, but if you are having you know making gears for say automobile gearboxes etcetera, you will never dream of using the milling machine no it should not be used they are not very accurate. So, in the small amount of time that we have I will I would like to introduce another idea which is just a moment this we have already seen.

(Refer Slide Time: 30:51)

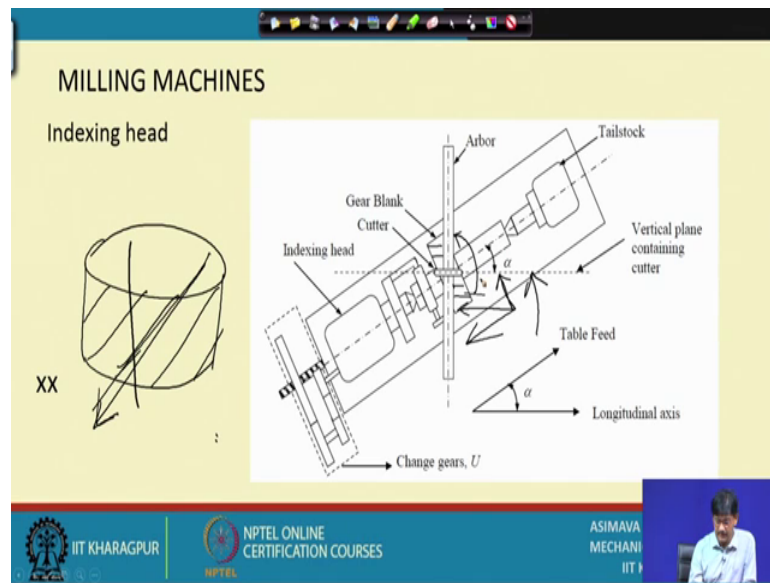

This gives us a brief discussion of the possibility of using the indexing head and the universality of the milling machine; that means, the ability to rotate about a vertical axis to carry out a machining process called helical milling.

What is helical milling? Helical milling means the ability of the milling machine or the application of the milling machine to cut a helix. Now, why on earth would I like to cut a helix? Am I trying to cut a helical thread while that is possible, this method is more applicable, in case of cutting of helical gears. What is a helical gear? A helical gear typically looks like this: it is a cylinder and the teeth are placed this way. Now, why would you suddenly require teeth which are helical? It has a number of advantages when power is being transmitted from one gear to another at a particular time. In case of straight spur gears, wherever the teeth are straight and parallel to the axis, maybe only one tooth would be doing the active transmission of power from one gear to another and it will be under quite a heavy load.


But if you take a section, you might find 2 or even 3 teeth you know taking part in the transmission of power in case of helical gears and also their operation is much more silent and they are less prone to shock loading etcetera, etcetera. Number of advantages are there because of which machining of helical gears is one of the most commonly carried out practices in machining. What is basically the setup? The setup is like

this as we can see; obviously, one particular feature is that the table is rotated the table is rotated why is the table rotated because we need to pass the cutter this way now. So, the cutter has to orient itself this is the cutter it has to orient itself at a particular angle to the gear blank this is the gear blank ok.

So, the cutter will be moving this way, but; however, sorry I made a mistake the table will be moving this way if the table moves this way, but still the cutter is not oriented in that direction if we have to move this way and if these are the teeth if this is the orientation of the teeth motion is not taking place that way. So, the relative motion of the tool and the work piece will not be in the direction that has been shown it is not in this direction. So, how is that made possible together with that the cutter is also rotating together with that the cutter is also rotating.

So, a motion component of the cutter the cutter is rotating this way a motion component of the cutter comes from the peripheral speed of the cutter together. With these I mean these 2 combine to have a relative motion exactly in the direction of the cutter teeth I work piece teeth right. So, the cutter smoothly passes in the direction of the helical path demarcated this way next what is this.

(Refer Slide Time: 34:37)

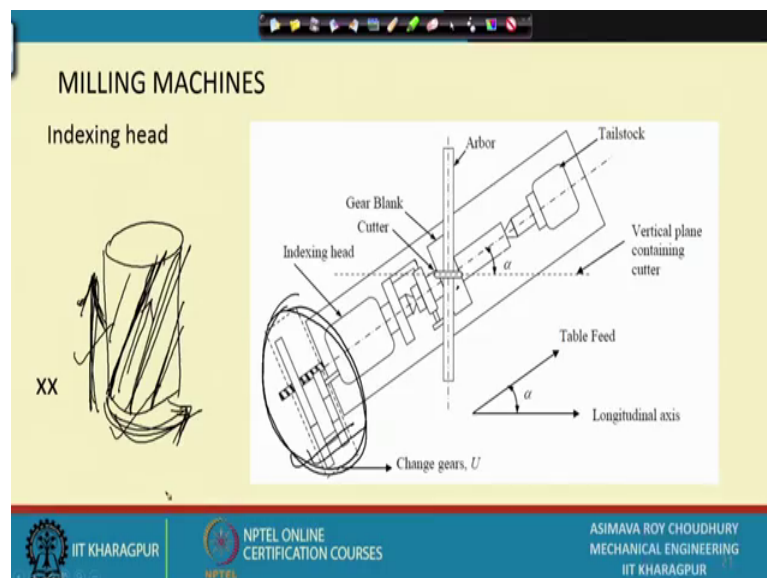

You know if you have to have helical motion if this is a gear and if this is to be the ultimate cut teeth in that case the cutting element has to have this relative motion with respect to the work piece helical motion that way is obtained by the combination of

circular motion and straight line motion straight line motion can be given by the longitudinal movement of the table, but who is giving this circular motion circular motion is given by the rotation of the blank mind you; you will always rise along the same straight line, I mean this helix will always have the same helix angle on a particular diameter if these two motions have a definite ratio between them how to establish a connection between rotational work piece and the longitudinal motion of the of the table these are the two motions longitudinal motion of the table rotation of the work piece.

So, for that longitudinal motion of the table is obtained by the rotation of the lead screw remember there is the lead screw we discussed so much. So, this screw will rotate and make the table move this table through these gears will be connected to the indexing head and from the indexing head output rotation is obtained. So, lead screw gearbox then index plate worm gear blank this way we are establishing a connection between rotation of the work piece and the table movement. Unless these are connected or definite relation between these two will not be there and a helix a constant angle helix will not be cut.

So, this is what is done we put a gearbox here which establishes a definite relation between these 2 depending upon the requirements the requirements might be cut a 15 degrees helix angle on a gear I mean cut of 15 cut 15 degrees teeth on a helical gear for that a definite gearbox will establish a particular relation between the longitudinal motion and the vertical motion that is what we are going to discuss in the next class. So, for the time being as the time is over for this lecture.

Thank you very much.